

# 8G8DLTP-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	265Ah
Capacity at C/20	225Ah
Weight	166.5 lbs. (76 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)

For Charging Parameters please refer to [www.mkbattery.com](http://www.mkbattery.com)  
Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

*Inches (mm)*

Length	21.03 (534 mm)
Width	11.00 (279 mm)
Height	10.82 (275 mm) <i>including terminal</i>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

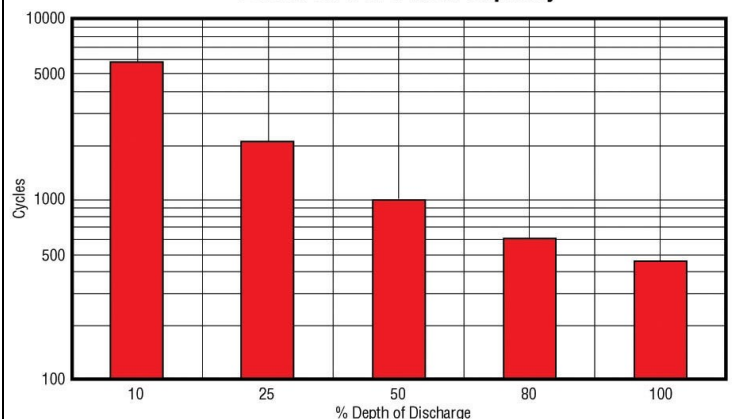

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

